



HIGH PERFORMANCE MOBILE DEHUMIDIFIERS

CALOREX DH65

- RAPID DRYING AND HUMIDITY CONTROL
- FULLY MOBILE - ROBUST SITE WHEELS AND HANDLE
- DESIGN ALLOWS STORAGE/TRANSPORT UPRIGHT OR FLAT
- IMMEDIATE OPERATION AFTER POSITIONING
- HIGH EFFICIENCY ROTARY COMPRESSOR
- WIDE TEMPERATURE OPERATION 0-40°C
- ROBUST CONSTRUCTION
- HIGH LEVEL CONDENSATE DRAIN

The Calorex DH65 has a wide range of applications in dehumidification:

- BUILDING DRYING
- BASEMENTS/CELLARS
- PAPER STORES
- UNHEATED PREMISES
- ELECTRICAL SUB-STATIONS
- PUMP ROOMS
- MUSEUMS
- SPORTS HALLS
- STOREROOMS
- WAREHOUSES
- FLOOD DAMAGE




Sole Agents...

AVON

Electric Ltd
P O Box 19748
Christchurch 0800 379247

calorex®

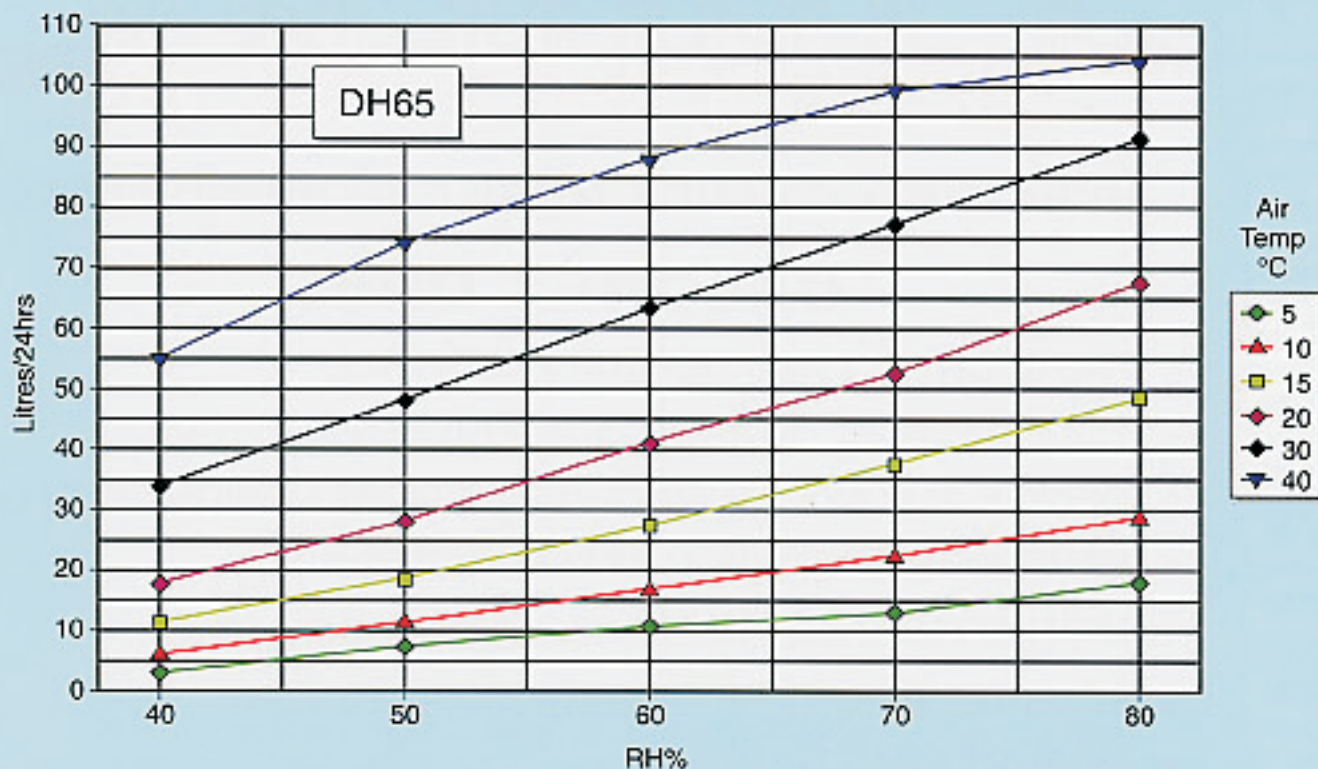

The Calorex DH65 is fitted with a fully automatic defrost system permitting efficient operation at low temperatures. The fully hermetic refrigeration system is charged with R407C.

DATA SHEET	UNIT	DH65AX
Electrical Data	230/1/50Hz	
FLA	Amps	7.5
LRA	Amps	32
Maximum Supply Fuse	Amps	13
Average Power Consumed	Watts	1070
Maximum Power Consumed	Watts	1731
Supply Voltage Limits	%	-10/+15
Air Flow	m ³ /hr	710
Sound Level @ 3m	dB(A)	58
Dimensions		
Height	mm	1020
Width	mm	630
Depth	mm	585
Weight	kg	65
Condensate drain size (gravity)	mm I/D	12
Condensate drain size (pumped)	mm O/D	9

calorex®

HEAT PUMPS & DEHUMIDIFIERS

Calorex Heat Pumps Limited
 The Causeway, Maldon, Essex CM9 5PU, England
 Tel: +44 (0)1621 856611 Fax: +44 (0)1621 850871
 Email: sales@calorex.com
 Web: www.calorex.com

OPTIONS

Built-in humidistat adjustable in range 20-80%.
 Condensate pump kit with full level control and
 30M pumping distance.